



SWIFT OKO POWER

PRODUCT DESCRIPTION:

SWIFT OKO POWER engine oils are advanced quality passenger car motor oils developed for the most modern high-output turbocharged gasoline engines in passenger cars, sport utility vehicles, vans, and light-duty trucks. These oils are designed to provide the highest levels of engine protection available. These premium engine oils contain ultra-pure base oils and a technologically advanced additive system that provides improved oxidation resistance, improved deposit protection, better wear protection, excellent low-temperature performance, and enhanced fuel economy.

APPLICATION:


Recommended to be used in North American, European & Japanese high output gasoline engines in passenger cars, sport utility vehicles, vans, and light-duty trucks where API SP, SN Plus, ILSAC GF-6A and / or API SN, API SM, API SL quality oils are specified, passenger cars and light-duty vehicles running on gasoline and ethanol-containing fuels up to E85, suitable for modern turbo- charged direct injection gasoline engines where LSPI protection is required. ILSAC GF-6B is not backwards compatible with older engines.

FEATURES & BENEFITS:

- Outstanding wear protection under a wide variety of operating conditions
- Special cleaning additive to help prevent the formation of sludge and harmful deposits
- Optimal engine operating temperature, owing to thermal control formula
- Limits formation of deposits on the most loaded engine parts
- Provides safe operation of catalytic exhaust converters
- Resistant to extreme thermal load, due to high quality of base oil
- Enables fast and easy start in extreme temperature conditions
- Extra cleaning performance

API LICENSE:

- SAE 0W-16
- SAE 0W-20
- SAE 5W-20
- SAE 5W-30
- SAE 5W-40
- SAE 10W-30

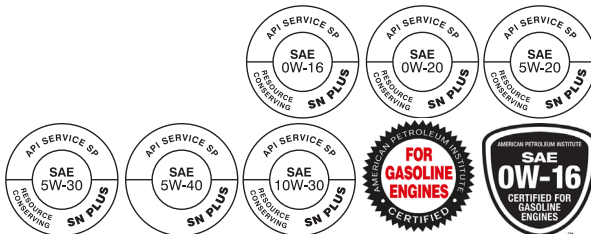

PERFORMANCE LEVELS / MEETS OR EXCEEDS:

SAE GRADES	0W-16	0W-20	5W-20	5W-30	10W-30	5W-40	10W-40	15W-40	20W-50
API	SP (RC)/ SN PLUS (RC)	SP (RC)/ SN PLUS (RC)	SP (RC)/ SN PLUS (RC)	SP (RC)/ SN PLUS (RC)	SP (RC)/ SN PLUS (RC)	SP	SP	SP	SP
ILSAC	GF-6B	GF-6A	GF-6A	GF-6A	GF-6A	-	-	-	-
GM	-	DEXOS1 GEN2	DEXOS1 GEN2	DEXOS1 GEN2	-	-	-	-	-
CHRYSLER	-	MS6395	MS6395	MS6395	MS6395	-	-	-	-
FORD	-	947-B1 962-A	945-B1 960-A	946-B1 961-A	-	-	-	-	-



TYPICAL PERFORMANCE:

PARAMETERS	ASTM	UNIT	SWIFT OKO POWER									
			0W-16	0W-20	5W-20	5W-30	10W-30	5W-40	10W-40	15W-40	20W-50	
KV@ 104°F /40°C	D-7042	cSt	TBR	TBR	TBR	TBR	TBR	TBR	TBR	TBR	TBR	TBR
KV @ 212°F /100°C	D-7042	cSt	7.1	8.3	8.3	10.3	10.3	14.8	15	14.9	19.5	
Viscosity Index	D-2270	-	172	170	166	170	151	175	156	145	128	
Density @15°C	D-4052	g/cm3	TBR	TBR	TBR	TBR	TBR	TBR	TBR	TBR	TBR	TBR
Flash Point (min)	D-92	°C	208	222	226	226	228	224	230	230	236	
Pour Point (max)	D-97	°C	-48	-42	-42	-42	-39	-42	-36	-33	-24	
TBN	D-2896	Mg KOH/g	7	7	7	7	7	7	7	7	7	
CCS, (°C)	D-5293	m.Pa.S	<6200 (-35°C)	<6200 (-35°C)	<6600 (-30°C)	<6600 (-30°C)	<7000 (-25°C)	<6600 (-30°C)	<7000 (-25°C)	<7000 (-20°C)	<9500 (-15°C)	

DISCLAIMER:

The test data mentioned above is not a definitive specification but serves as an indication and may fluctuate within acceptable production tolerances. Venom retains the right to alter this test data. Any updated information will replace previous versions, so please consult the latest Technical Data Sheet (TDS).

HEALTH & SAFETY, ENVIRONMENT:

Extended and repeated exposure to oil can lead to skin conditions. Please avoid contact. If you do come into contact with oil, wash the affected area immediately with soap and water. Do not dispose of used oil down drains or into the environment; instead, take it to an authorized used oil collection point.

HEALTH & SAFETY:

This product is unlikely to pose significant health or safety risks when used properly in the recommended application and with good personal hygiene practices. For more information, please refer to the Safety Data Sheet (SDS), which is available upon request from your local sales office.

PROTECT THE ENVIRONMENT:

Please take used oil to an authorized collection point and adhere to local regulations. Do not discharge it into drains, soil, or water.

STORAGE:

We recommend storing all packages in a covered area. If outdoor storage is necessary, drums should be positioned horizontally to prevent water ingress and protect the markings. Products should never be stored above 60°C or exposed to direct sunlight or freezing temperatures.